

LED KIOSK/TOTEM INSTRUCTIONS

Chris Thomas July 26, 2022

- 1) Make a movie using these specs:
 - 288 pixels wide x 972 pixels high
 - H264 encoding in a MP4 container
 - 29.97FPS up to 60 fps
 - data rate 1mbits to 10 mbits/sec.
- 2) Email or dropbox movie/s to your iPhone
- 3) Save movie/s in Photos/Video app on iPhone
- 4) Download the ViPlex Handy app (from App Store)
- 5) Stand next to a powered on totem and open your Settings -> Wifi and look for the name of its built-in access point (there is a label on the top, back of each unit ex: AP**400000214**)
- 6) Join that kiosk's network with Password: 12345678
- 7) Once connected to the totems network, launch ViPLex Handy, click on "Local Devices" in the bottom menu, select the matching number of the totem (ex: Taurus-**0400000214**) and connect to the device (blue connect button).
- 8) click on 3dots to see more options, may have to click on name again to connect / disconnect.
- 9) click on bottom menu "Local Solutions"

LED KIOSK/TOTEM INSTRUCTIONS

Chris Thomas July 26, 2022

10) click "+ Add Solution"

11) give the solution a unique name, screen resolution of 288*972 with the first window layout (no splits) hit OK

12) click Add Media button, select media type "Video"
click on thumbnail of the desired movie, hit OK

13) You must "publish" the solution by clicking on the paper airplane icon in the upper right.

14) Movie should start playing and automatically loops

15) to gain more controls (brightness, etc) click "local devices"
in lower menu, click three dots button next to connected device, to bring up the "Device Management" screen

16) Brightness is found in the screen settings menu

SEE BELOW SCREEN CAPTURES, organized by above section numbers

4.

7:07



< Search



ViplexHandy

Xi'an NovaStar Tech Co.,Ltd

UPDATE



9 RATINGS

2.6



AGE

4+

Years Old

CATEGORY



Utilities

DEV

Xi'an Nc

What's New

Version History

Version 4.6.3

2w ago

Bug Fixes

Fixed some known bugs.


Preview

Solution Editing and Publishing

Solution editing and publishing are easy and convenient

Screen Manag

A variety of functions are managemen

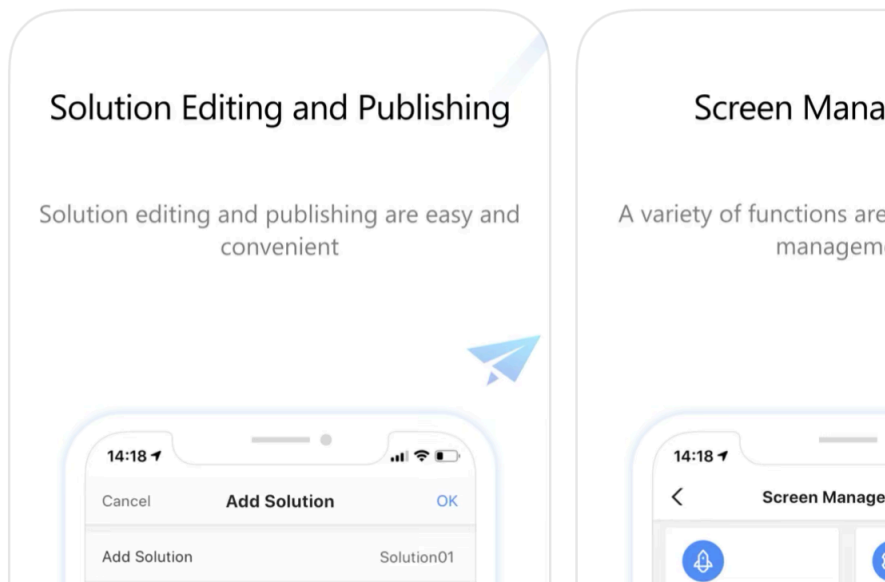

Today



Games



Apps





Arcade





Search

5.

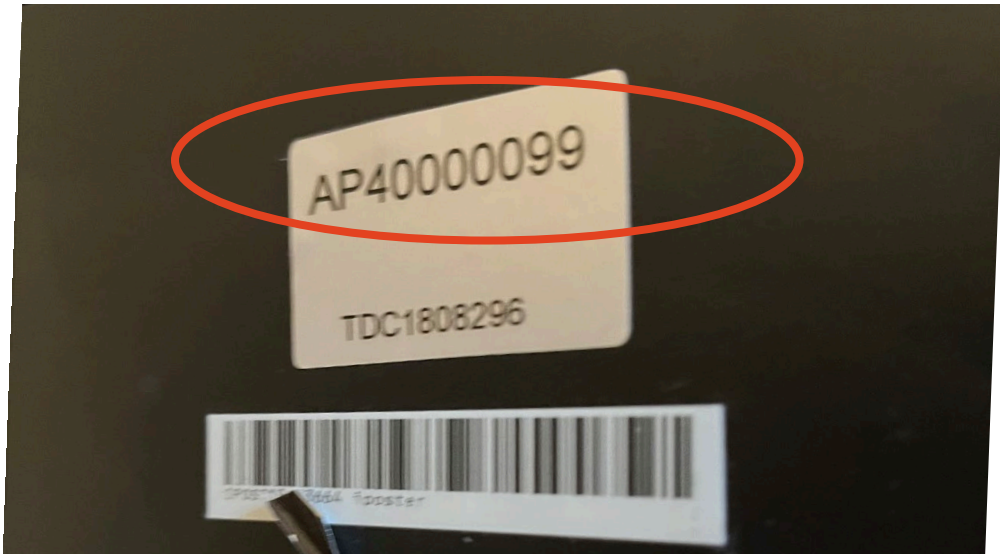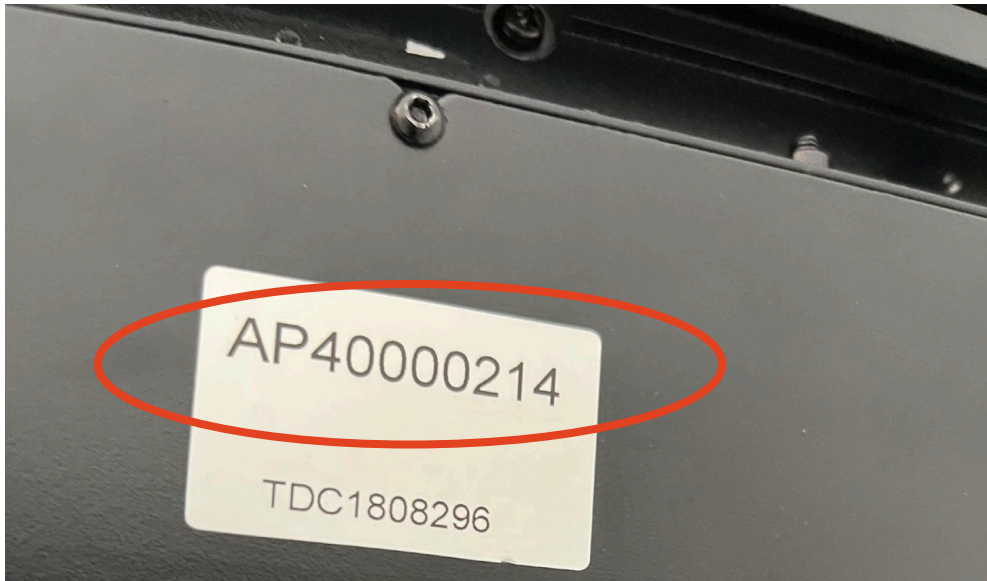


Password: 12345678

7.

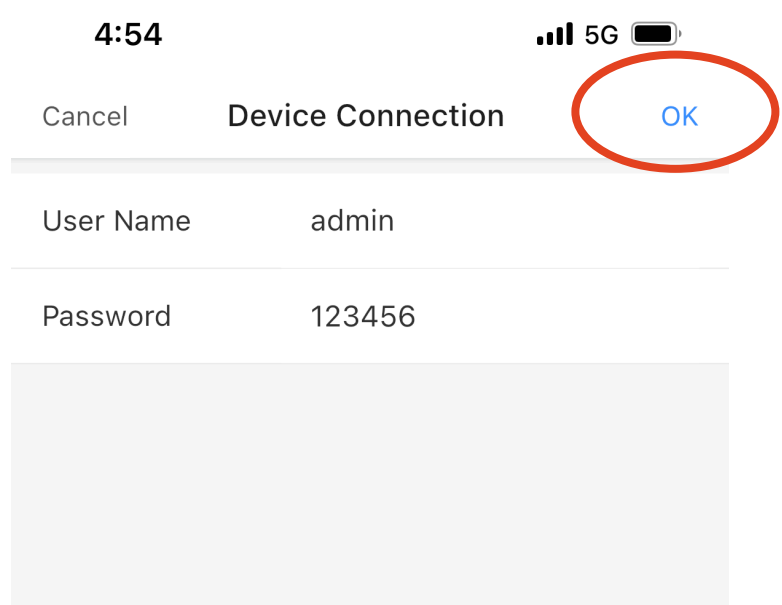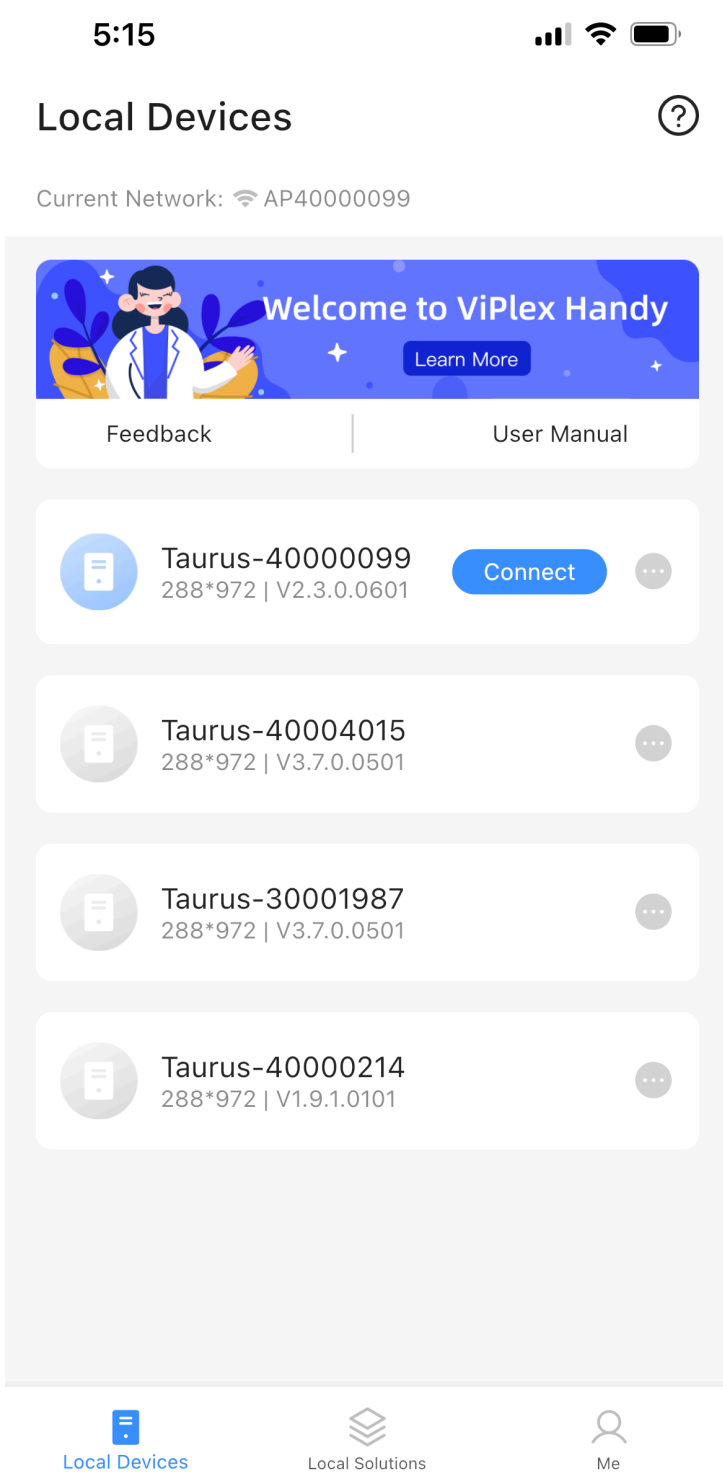

Password: 123456

8.

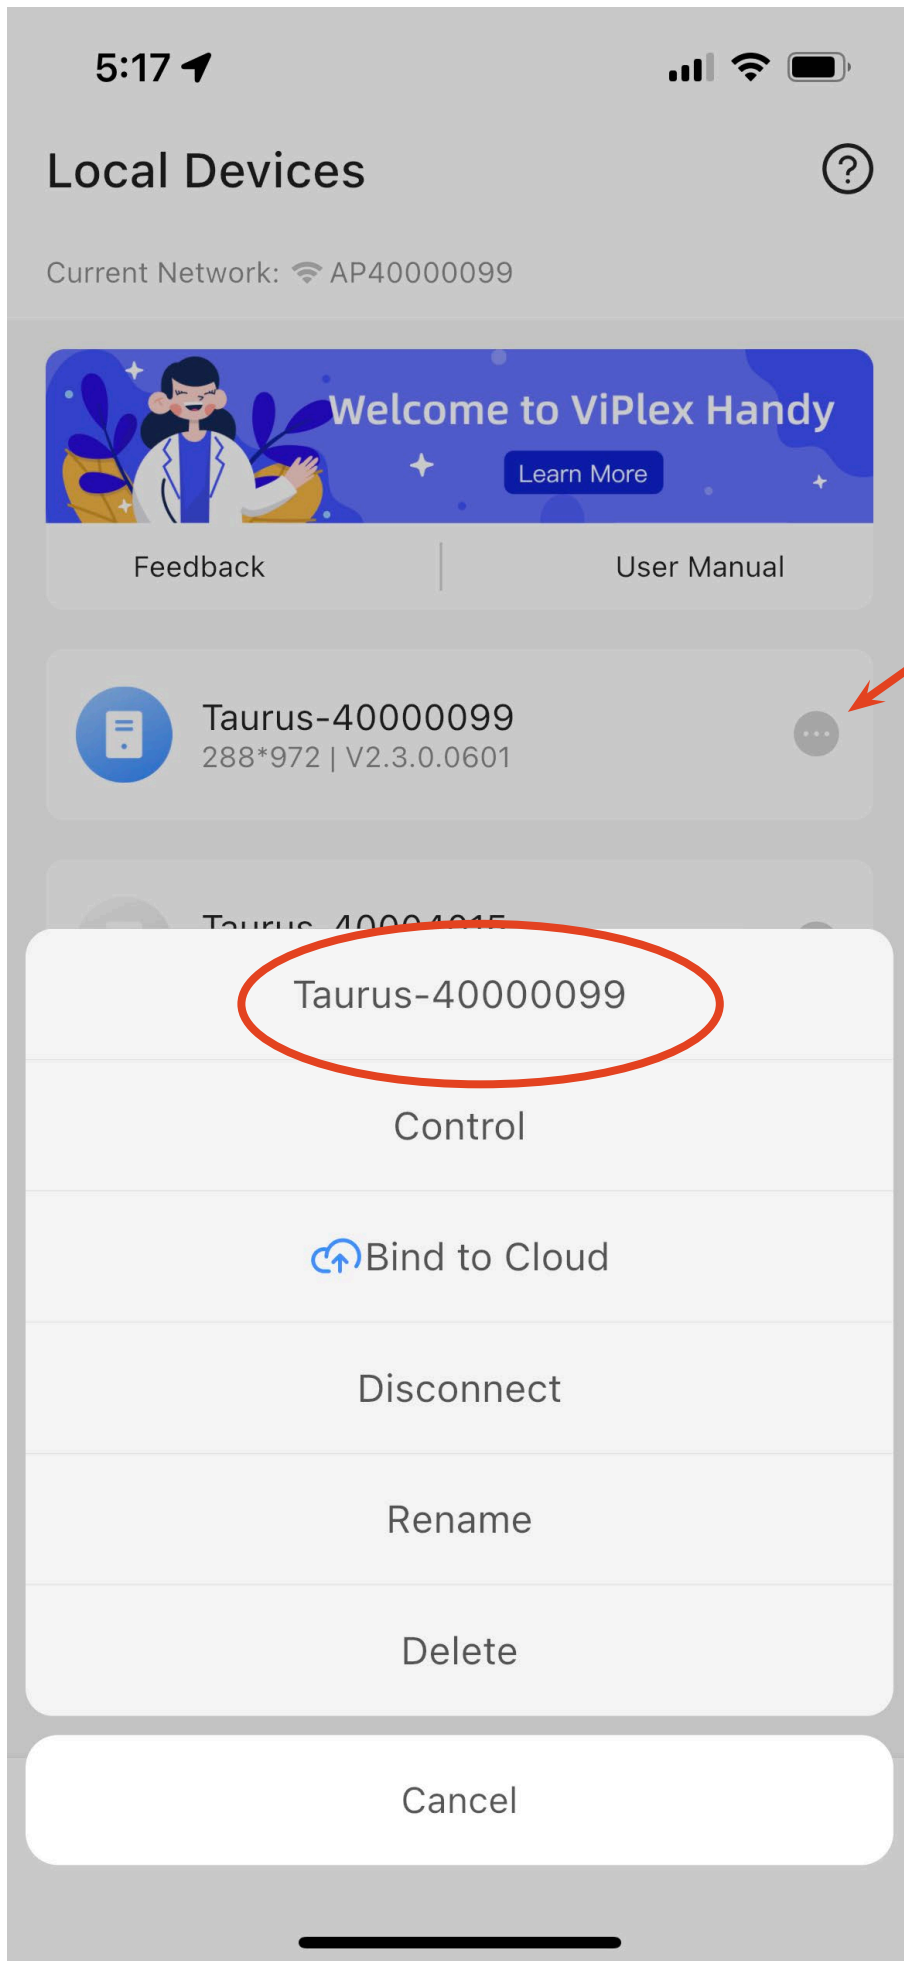

9.& 10.

4:55

5G

Solution List

Select


The screenshot shows a mobile application interface for a 'Solution List'. At the top, the status bar displays the time '4:55', '5G' connectivity, and a battery icon. The title 'Solution List' is centered, with a 'Select' link on the right. The main content area contains a grid of six solution cards. The first card is a white box with a blue plus sign and the text 'Add Solution', which is circled in red. The other cards are labeled 'Solution05', 'Solution04', 'taylor1', 'Solution03', and 'Solution02'. A red arrow points from the bottom of the screen to the 'Local Solutions' icon in the navigation bar.

Local Devices


Local Solutions

Me


11.

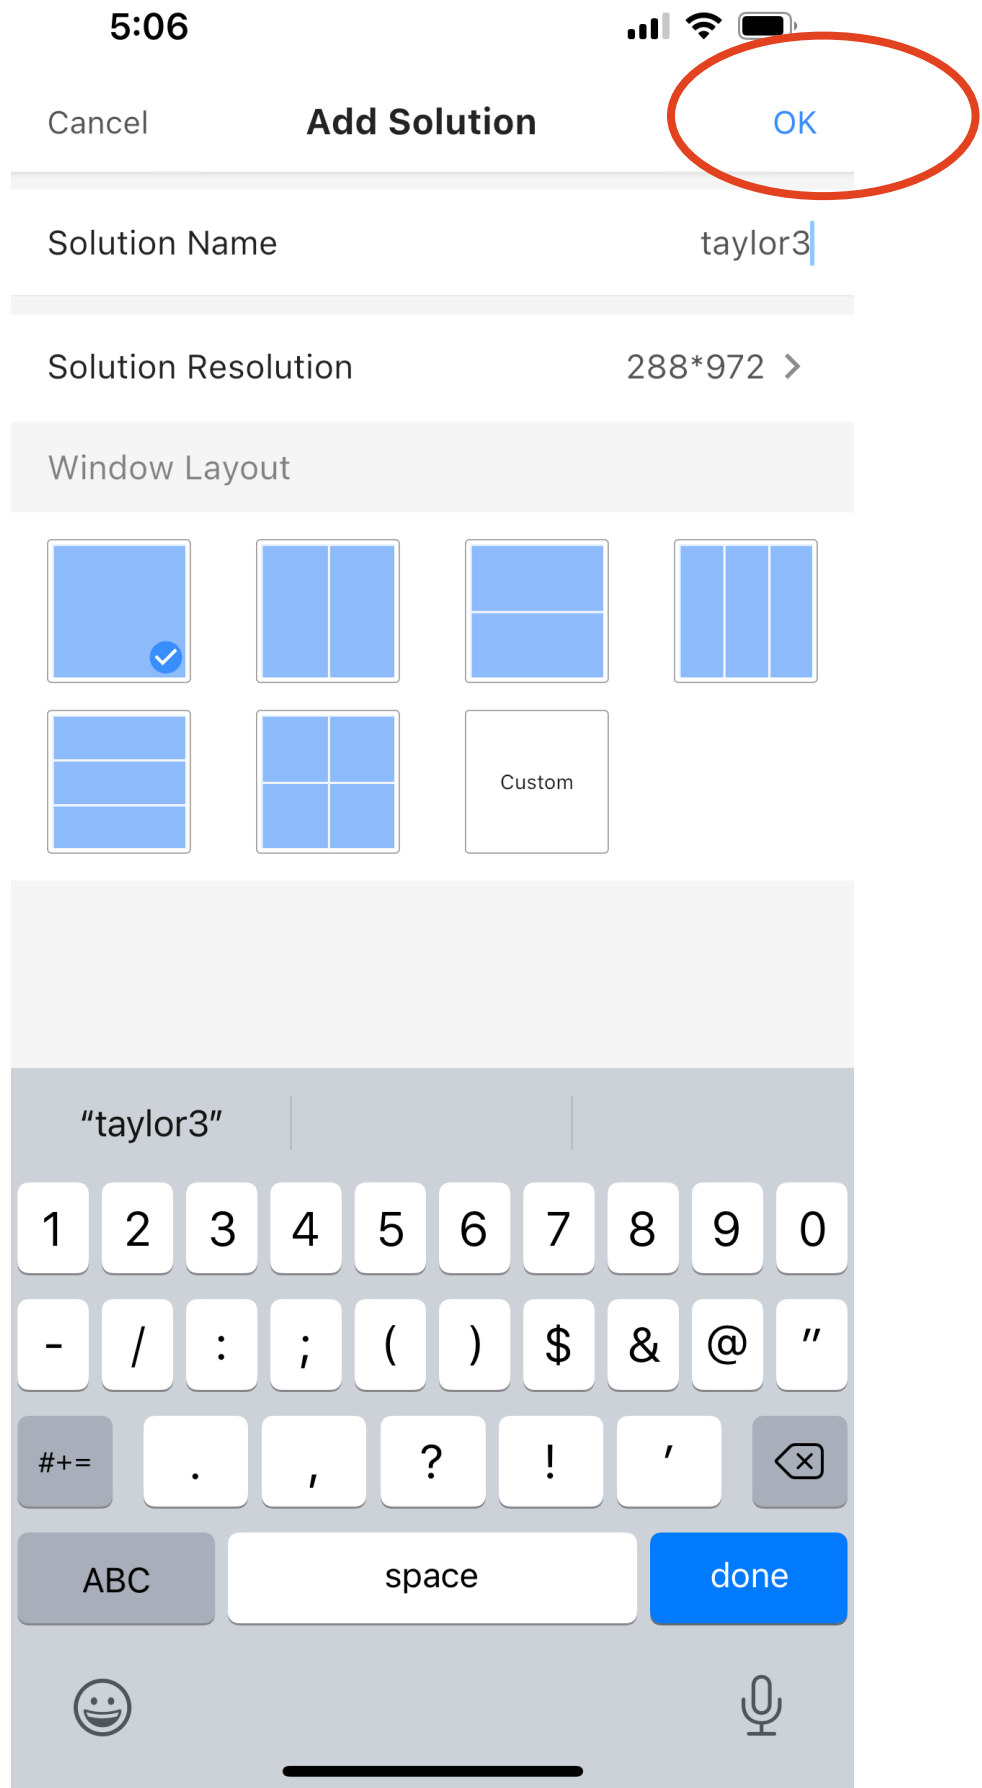

12.

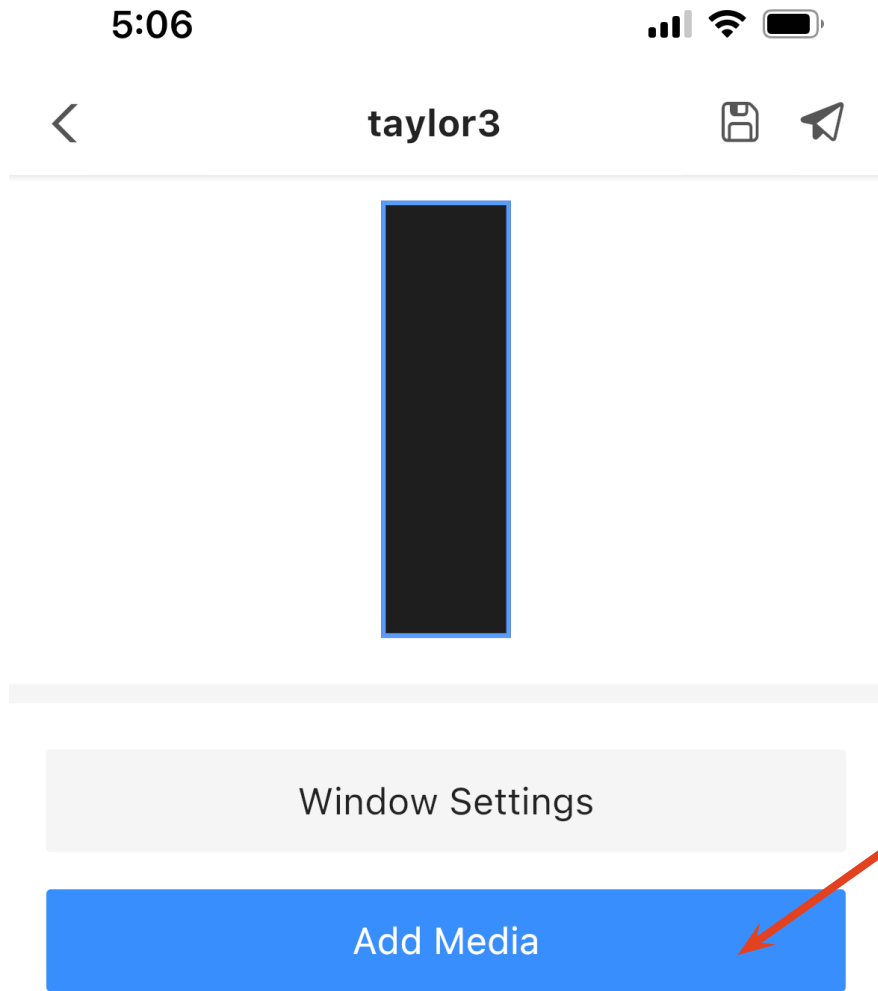

12.

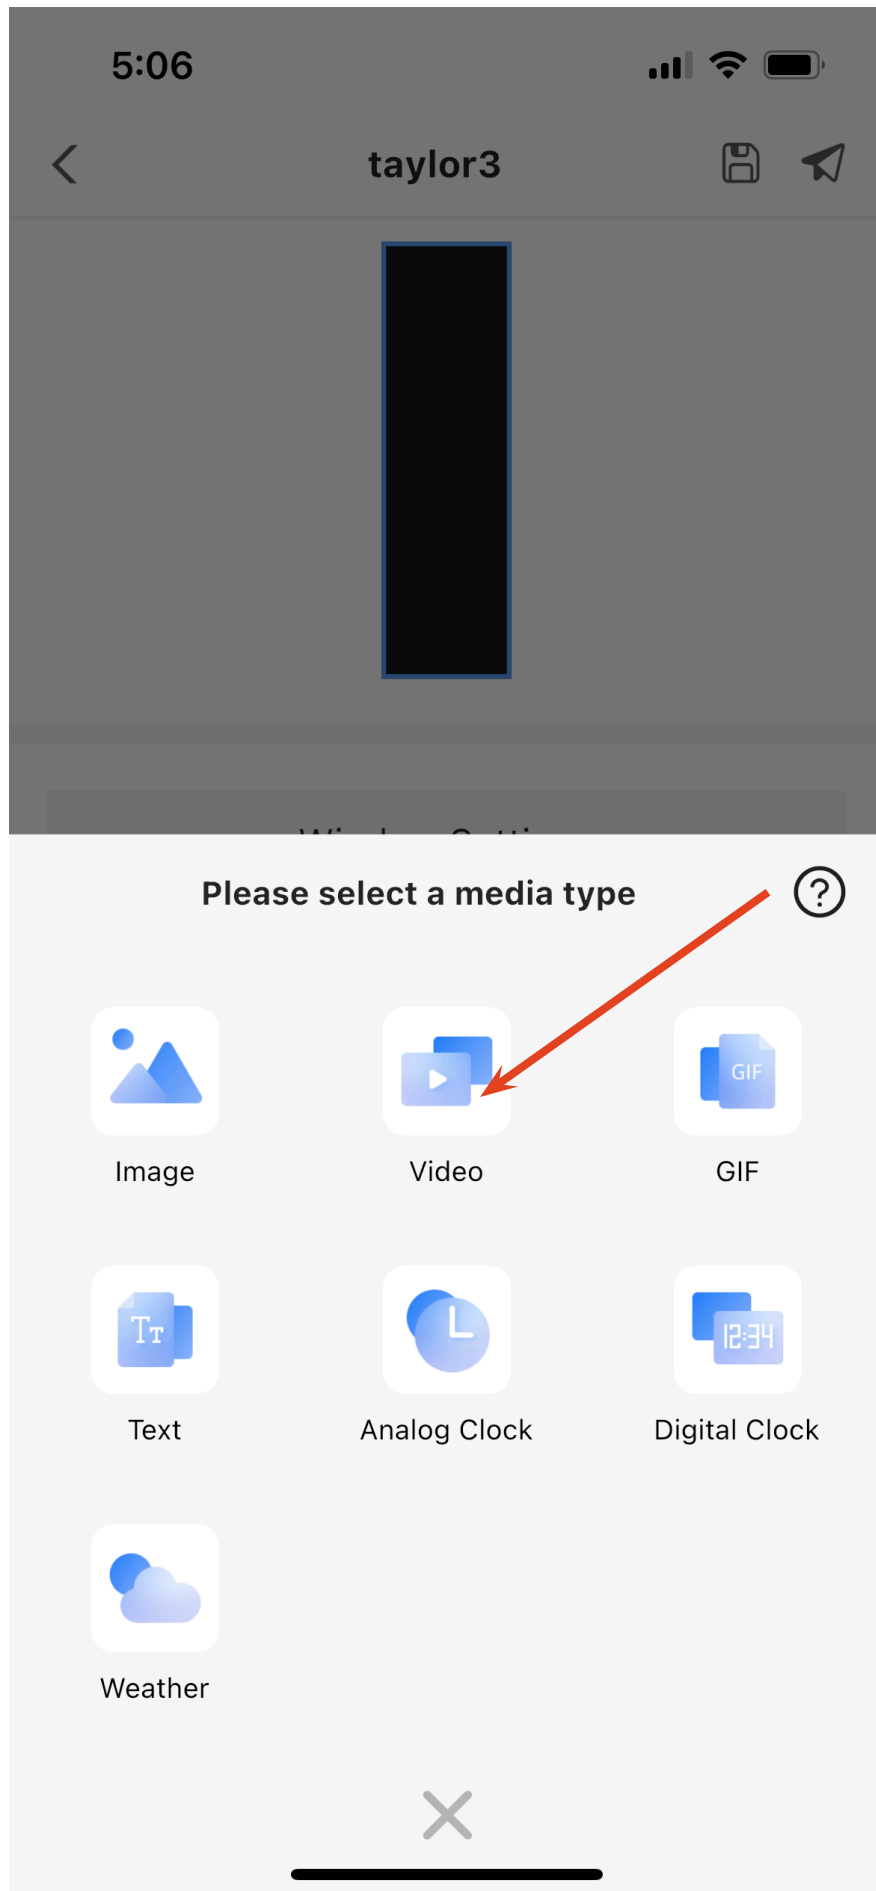

12.

5:06




Cancel

Select Video

OK(1/9)

Please turn off automatic iCloud backup and then download the media to your phone.

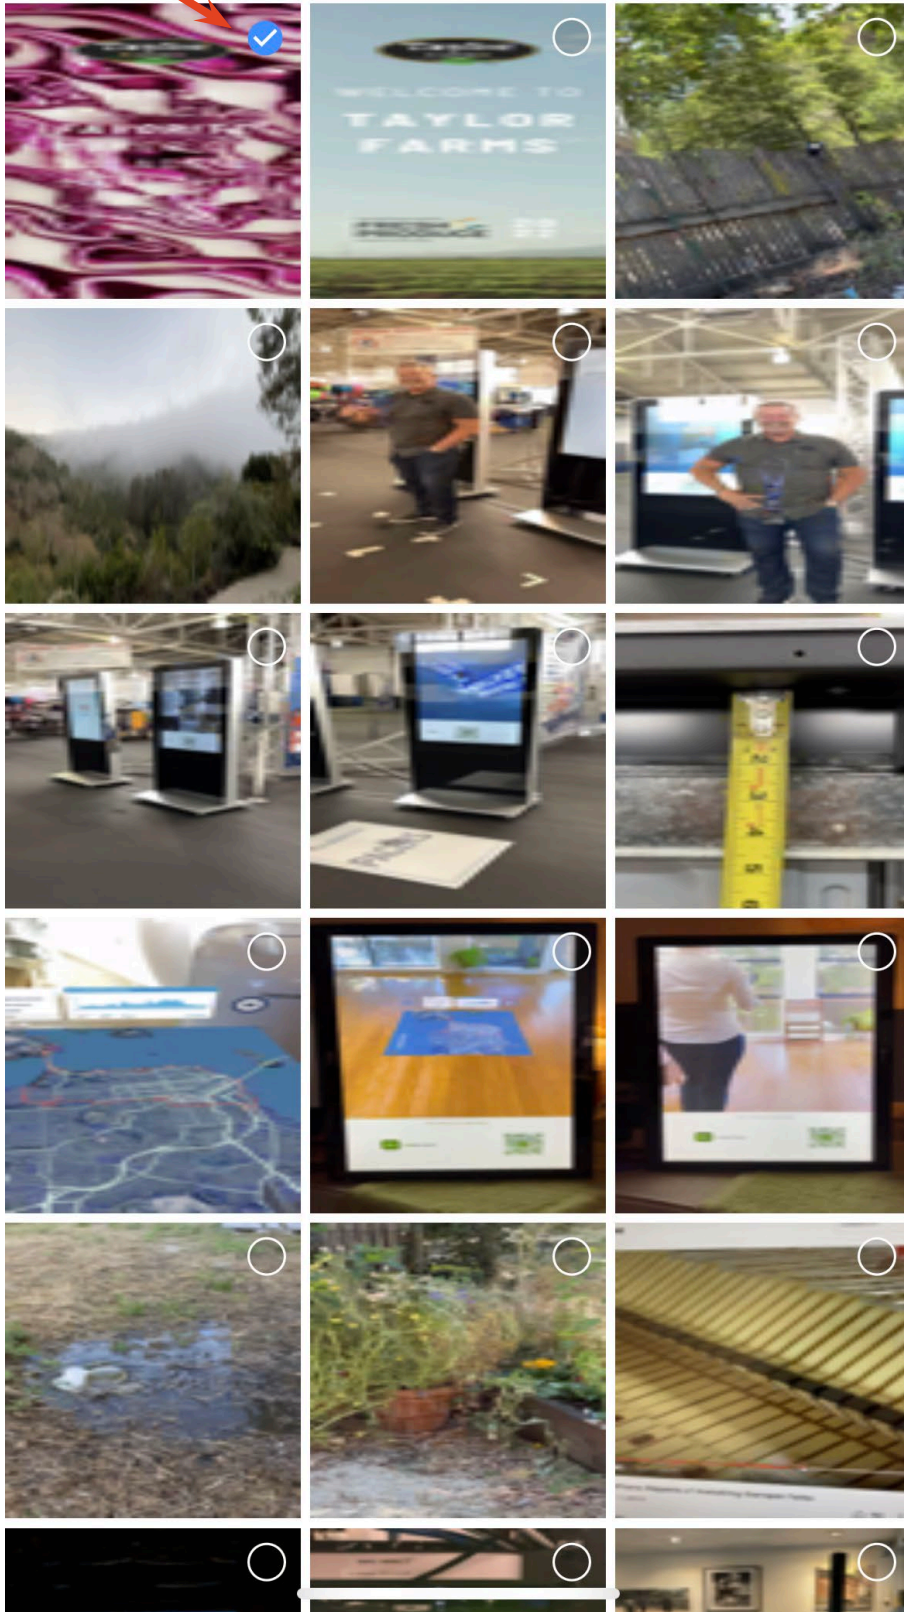


13.


5:06



taylor3

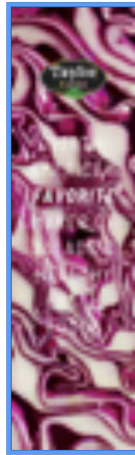

Window Settings



Tap and drag media to change the order

File

Replace

Fill the Screen

Original Size

13.


5:06



Cancel


Publish

Publish



If the solution contains video codecs that are not supported by players or the video resolution exceed the maximum supported resolutions of the screen, the solution will not be played normally. [View Details](#)

Taurus-40000099



13.

5:07



Publish

Done

If the solution contains video codecs that are not supported by players or the video resolution exceed the maximum supported resolutions of the screen, the solution will not be played normally. [View Details](#)

Taurus-40000099

Completed

15.

4:57



Device Management



Quick Control
Time Zone, Volume,
Color Temperature




Bind to Cloud Services
VNNOX Standard/AD,
VNNOX Care



Advanced Settings
Password, Time
Synchronization



Screen Settings
Screen Status,
Brightness, Restart



Network Settings
Wireless, Wired, Mobile
Networks



Monitoring
Temperature,
Screenshot, System
Parameters



Video Control
Video Source, Output
Position



Playback
Screen Solution List